


# Aer conditionat

# Platinum

## FOCUS

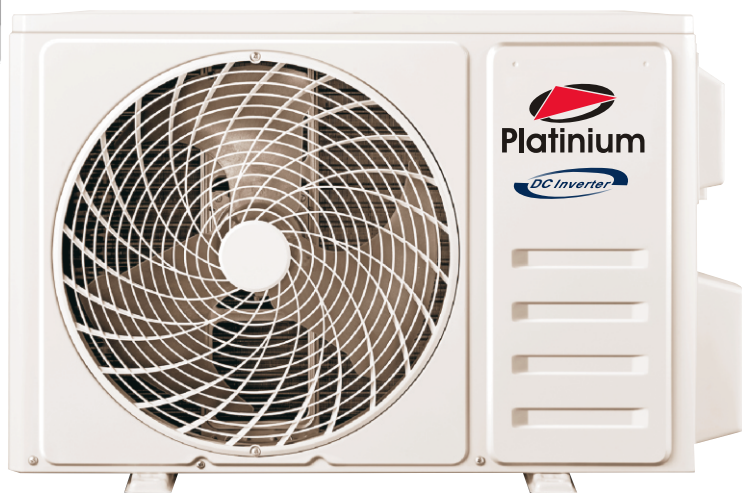

A++

KIT  
INSTALARE

-20 °C

WI-FI



**WI-FI  
control**



**KIT instalare**

Model			PWIFI-09R32++KIT/N	PWIFI-12R32++KIT/N
			R32 9000Btu	R32 12000Btu
Capacitate racire		W	2600W(940~3300)	3400W(1000~3770)
Capacitate incalzire		W	2680W(940~3200)	3420W(1000~3810)
SEER			6.1	6.1
Clasa energetica pt racire			A++	A++
SCOP			4	4
Clasa energetica pt incalzire			A+	A+
Consum anual	Racire	kWh	150	196
	Incalzire	kWh	700	770
Cantitate condens		L/h	1	1.2
Nivel zgomot - unitate interioara	(T,H,M,L,Mute)	dB(A)	52/47/43/35/32	53/47/43/35/32
Nivel zgomot - unitate exterioara		dB(A)	62	62
Presiune sunet - unitate interioara	(T,H,M,L,Mute)	dB(A)	40/37/33/25/22	40/37/33/25/22
Presiune sunet - unitate exterioara		dB(A)	52	50
Date electrice				
Alimentare			220-240V~/50Hz/1P	220-240V~/50Hz/1P
Interval voltaj		V	165~265	165~265
Curent de operare	Racire	A	4.1(1.2~8.0)	5.8(1.5~9.0)
	Incalzire	A	3.6(1.2~9.0)	4.4(1.5~10.0)
Putere consumata	Racire	W	851(240~1380)	1130(290~1500)
	Incalzire	W	786(240~1552)	1005(290~1720)
Sistemul frigorific				
Refrigerant/Incarcare			R32/0.49kg	R32/0.52kg
Compresor	Tip		Rotativ	Rotativ
			RECHI	GMCC
Volum aer interior Racire/Incalzire		m <sup>3</sup> /h	420/420	550/570
Conexiuni electrice				
Intre unitati			4×1.0mm <sup>2</sup>	4×1.0mm <sup>2</sup>
Dispozitiv expansiune			Capilar	Capilar
Conexiuni tevi	Gaz	Inch	3/8"	3/8"
	Lichid	Inch	1/4"	1/4"
Altele				
Aria aplicabila		m <sup>2</sup>	9~22	14~28
Lungime maxima traseu		m	10	10
Diferenta max de inaltime		m	5	5
Temperatura de operare		grd C	16-31	16-31
Temperatura ambient	Exterior	grd C	Rac :-15-53/Inc :-20-30	Rac :-15-53/Inc :-20-30
( Racire / Incalzire)	Interior	grd C	Rac: 17-32/Inc:0-30	Rac: 17-32/Inc:0-30
Dimensiuni nete	Interior	mm	698×255×190	777×250×201
(W x H x D)	Exterior	mm	712×459×276	712×459×276
Dimensiuni brute	Interior	mm	764×325×267	850×320×275
(W x H x D)	Exterior	mm	765×481×310	765×481×310
Greutate neta / bruta	Interior	kg	6.5/8.2	6.5/8.2
	Exterior	kg	19/22	20/23



**I feel**

**Sterilizare  
la 56°C**

**Auto -  
Restart**



Filtru Ioni Argint  
-optional-

**Funcție  
I set**

**LED  
display**